
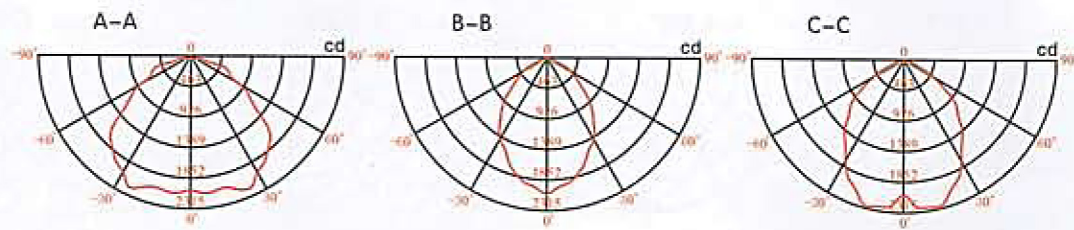






EHB200

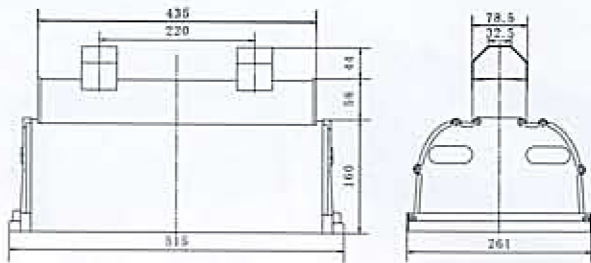

θ 1/6	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
A-A	2049	2098	2098	2074	2164	2213	2056	1981	1858	1744	1431	1135	963	674	616	255	174	8	8
B-B	2049	1961	1914	1813	1685	1516	1423	1246	1079	916	701	559	445	304	149	88	26	6	0
C-C	2049	2223	2259	2274	2099	1976	1765	1546	1403	1176	1045	793	580	370	204	51	6	6	0

CODE	(W)	(V)	(A)	PF	CRI	(Lm)	(h)	(kg)	Dimension (mm)		
									L	W	H
SL36-4U.D	36	240	0.16	0.99	83	3096	12000	3.79	380	258	213
SL55-4U.D	55	240	0.25	0.99	83	4730	12000	4.28	425	258	213
SL75-4U.D	75	240	0.34	0.99	83	6450	12000	4.61	475	258	213
SL100-4U.D	100	240	0.45	0.99	83	8600	12000	4.93	515	258	213
SL125-4U.D	125	240	0.56	0.99	83	10750	12000	5.17	555	258	213
SL150-8U.D	150	240	0.68	0.99	83	12900	12000	7.88	522	408	265
SL200-8U.D	200	240	0.91	0.99	83	17200	12000	8.29	557	408	265
SL250-8U.D	250	240	1.13	0.99	83	21500	12000	8.72	592	408	265
SL300-16U.D	300	240	1.36	0.99	83	25800	12000	12.76	825	408	265
SL400-16U.D	400	240	1.81	0.99	83	34400	12000	13.91	895	408	265
SL500-16U.D	500	240	2.27	0.99	83	43000	12000	14.51	965	408	265

EHB150

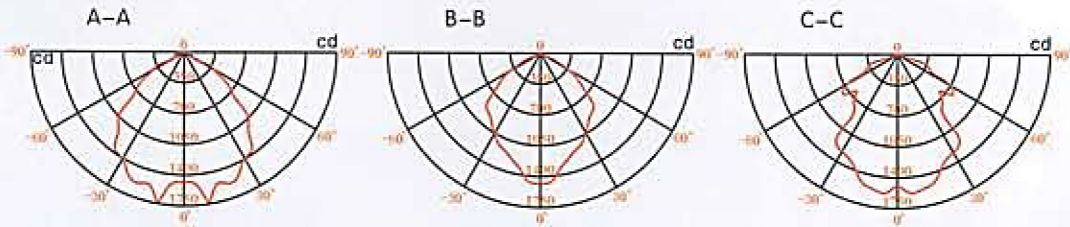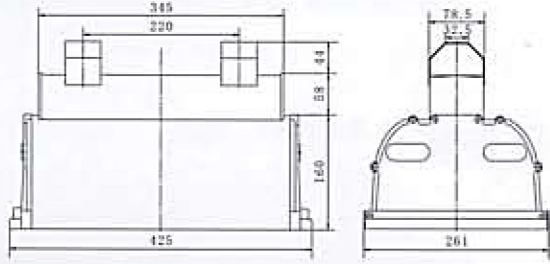

θ 1/6	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
A-A	1483	1504	1734	1560	1588	1531	1406	1373	1171	1068	756	631	438	313	110	104	6	6	0
B-B	1483	1468	1334	1249	1178	1135	1056	973	908	879	731	568	448	255	170	56	15	6	0
C-C	1483	1564	1544	1510	1401	1300	1268	1226	775	714	626	766	691	411	365	196	68	34	6